

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
28 April 2005 (28.04.2005)


PCT

(10) International Publication Number  
**WO 2005/039158 A1**

- (51) International Patent Classification<sup>7</sup>: **H04M 1/02, A45C 11/00**
- (21) International Application Number: **PCT/AU2004/001409**
- (22) International Filing Date: 14 October 2004 (14.10.2004)
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
2003905591 14 October 2003 (14.10.2003) **AU**
- (71) Applicant (for all designated States except US): **SENTINEL GARDENS PTY LTD [AU/AU]; 9. Sentinel Gardens, Leeming, W.A. 6149 (AU).**
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **SOFOULIS, Robert,**
- (74) Agent: **WRAY & ASSOCIATES; Level 4, The Quadrant, 1 William Street, Perth, W.A. 6000 (AU).**
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.**
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): **ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),**

[Continued on next page]

(54) Title: **PROTECTIVE SHROUD**

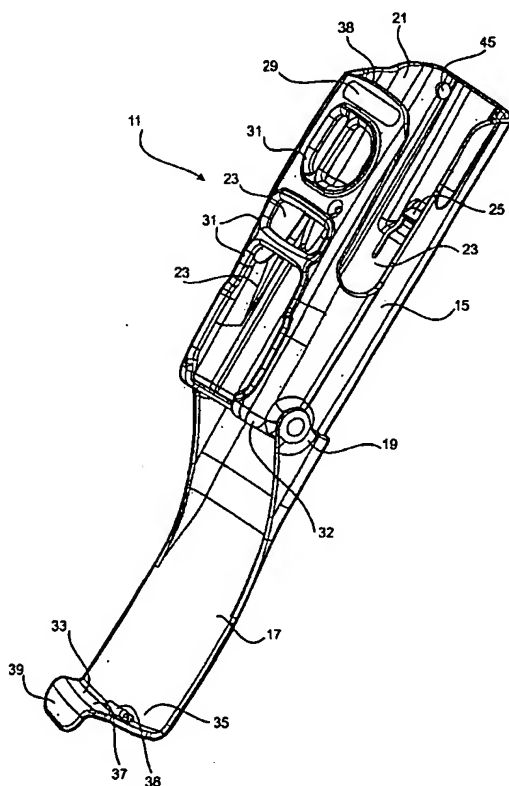

(57) Abstract: A shroud (11) for protecting a communication device, the shroud (11) comprises a receptacle (15) having an opening (21) to receive the device. The receptacle (15) is adapted to releasably retain the device therein. The shroud (11) is movable between a closed condition and an open condition, wherein in the open condition the communication device is fully operable, while in the closed condition the communication device is substantially protected from damage.

WO 2005/039158 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*